

AXIS TM1804-LE Housing

Outdoor-ready housing with built-in IR

AXIS TM1804-LE housing with powder coated aluminum casing, is an outdoor-ready housing. The housing has IP66/IP67 protection against the ingress of dust and water. The interior heater and fan extend the temperature limit of the housing. AXIS TM1804-LE housing, with up to 60 meters effective IR coverage, significantly improve image quality in poor light conditions. AXIS TM1804-LE housing provides easy and flexible installation by offering various installation options such as wall mount or pole mount.

- > **IP66, IP67 rated**
- > **Outdoor ready**
- > **Weather protection against rain and dust**
- > **Built-in IR illumination for up to 60 m coverage**
- > **AC and DC input to power housing, camera and IR illumination**



AXIS TM1804-LE Housing

General

Supported products	Indoor models of AXIS M11 Mk II Series ^a Indoor models of AXIS P137X Series ^a
Casing	Material: IP66, IP67 rated, powder coated aluminum Color: White NCS S 1002-B Front glass thickness: 3mm Tamper resistant screws
Power	Input voltage : 24 V AC / DC (max 48 W), power supply not included Output voltage : 12 V DC (max 8 W)
Environment	Indoor Outdoor
Operating conditions	Indoor models of AXIS M11 Mk II Series: -30 °C to 50 °C (-22°F to 122°F) Humidity 0–95% RH Indoor models of AXIS P137X Series: -20 °C to 55 °C (-4°F to 131°F) Humidity 0–95% RH
Approvals	Product Markings CE, WEEE EMC EN 55032 Class A, EN 55035, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2

Environment

IEC/EN 60529 IP66, IEC/EN 60529 IP67, NEMA 250 Type 4X, IEC 62262 IK10^b


Safety

IEC/EN 62368-1 ed.3, IEC/EN 62471 risk group 1

Dimensions	163 x 139 x 461.5 mm (Lens diameter of camera must be less than 42 mm to fit in the front window)
Weight	2.2 kg
Illumination LED	Power-efficient, long-life 850 nm IR LED. Range of reach up to 60 m, depending on the scene.
Included accessories	Installation Guide, Allen key, Mounting Kit
Required accessories	AXIS T94X01A Wall Mount
Optional accessories	AXIS T94Y01G Pole Mount, AXIS Bird Control Spike
Warranty	3-year warranty, see axis.com/warranty

a. *Lens diameter of the camera must be less than 42 mm.*

b. *Excluding front window.*

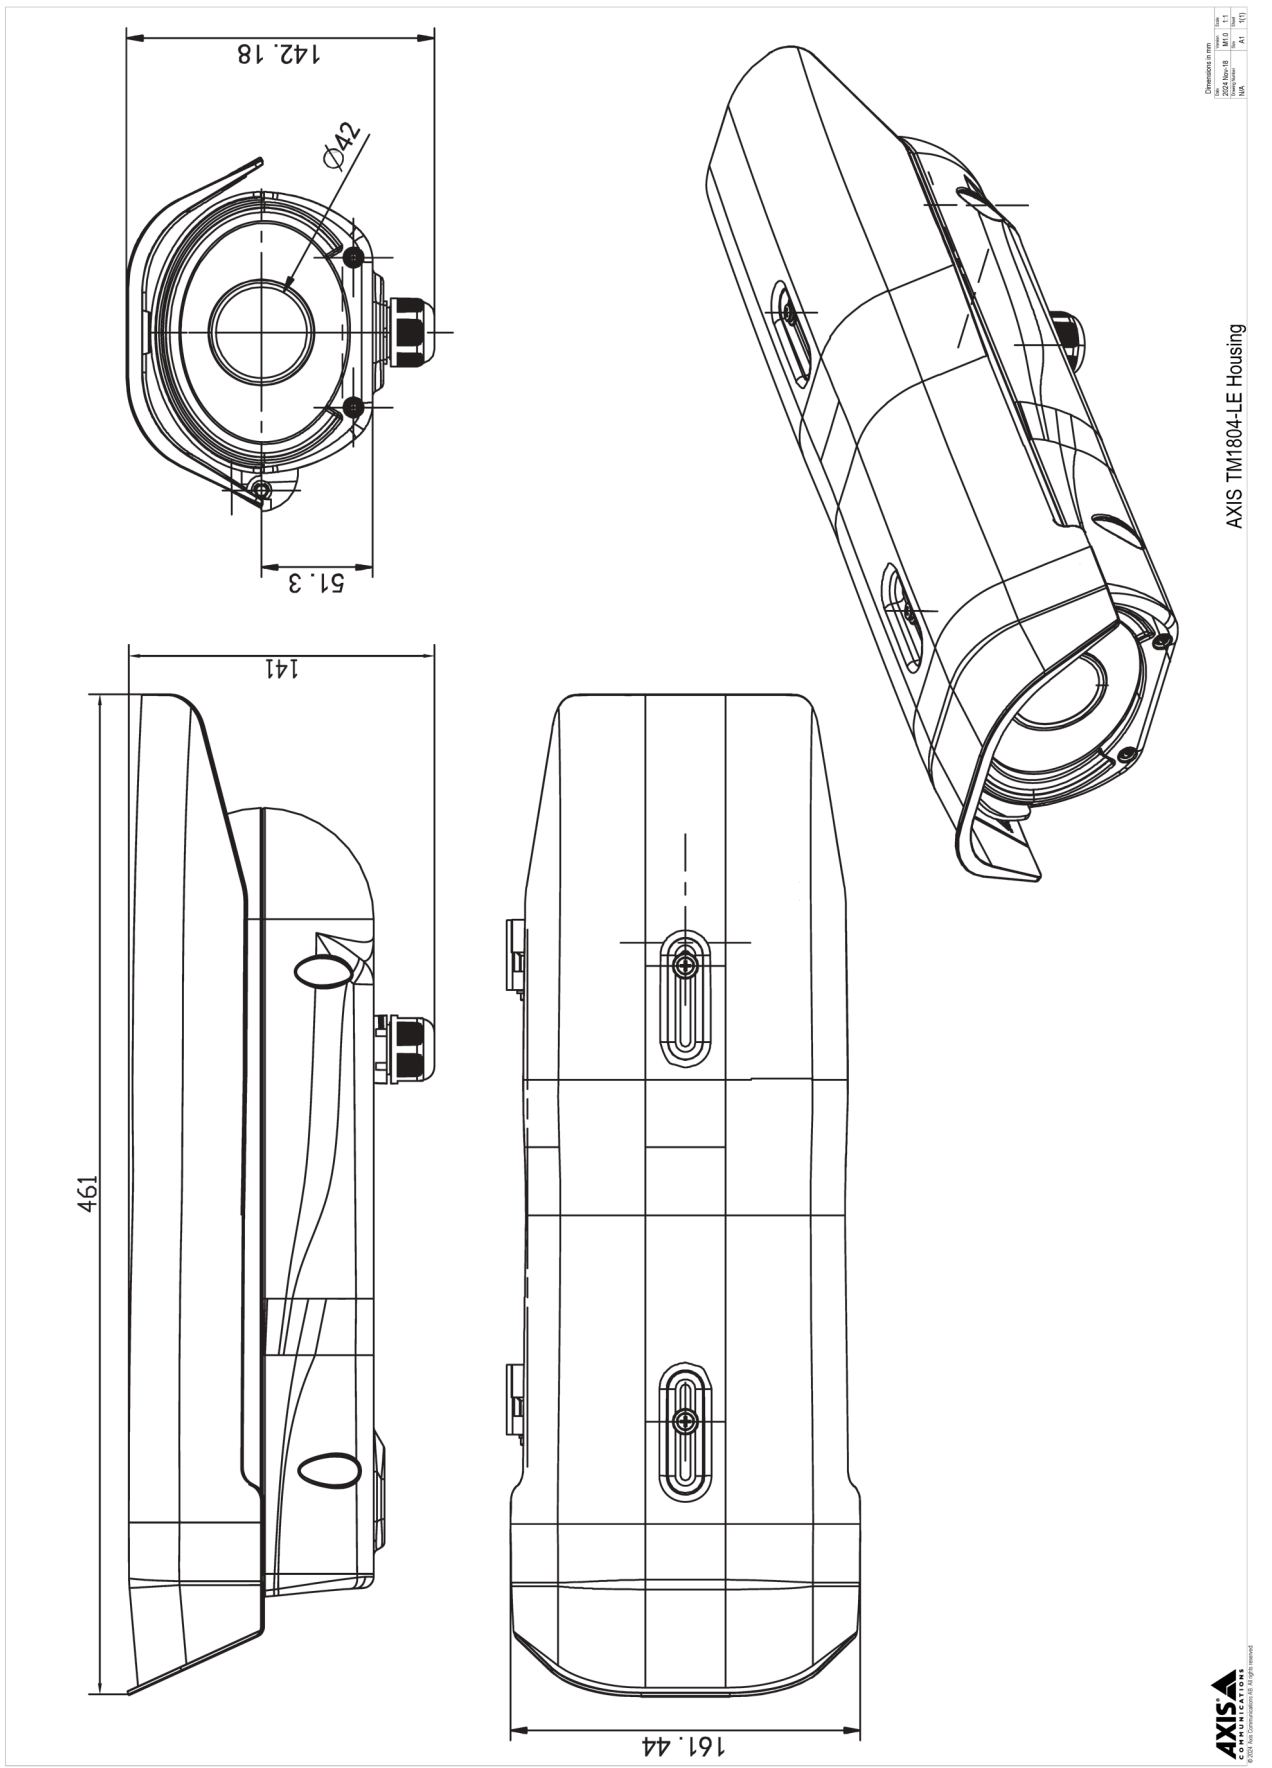

AXIS TM1804-LE Housing

