

AXIS S3016 Recorder

16-channel recorder with powerful PoE switch

AXIS S3016 Recorder is a 1U rack recorder with an integrated PoE switch for up to 16 devices and a maximum of PoE class 4 per port. It provides reliable recording thanks to the four surveillance-grade hard drives and different RAID levels. This high-performance recorder offers a gigabit switch for connecting network devices and a 2.5 gigabit uplink for video recordings in ultra-high definition and includes a 5-year warranty. The recorder can be used in single-site, multi-site systems and for expanding storage and network in existing systems. It is compatible with both AXIS Companion as well as AXIS Camera Station video management software and mobile app.

- > [Rack recorder with integrated PoE switch](#)
- > [Easy to install and operate](#)
- > [Surveillance-grade hard drives](#)
- > [USB port for exporting video](#)
- > [5-year warranty](#)



AXIS S3016 Recorder

Variants	AXIS S3016 Recorder 8 TB AXIS S3016 Recorder 16 TB AXIS S3016 Recorder 32 TB
Hardware	
Processor	i.MX 8QuadMax
Storage	Hot swappable Surveillance Class HDD Total HDD slots: 4 Free HDD slots: 0 8 TB Out-of-the-box storage: 6 TB after RAID 5 Out-of-the-box capacity without RAID: 8 TB (4x2 TB) 16 TB Out-of-the-box storage: 12 TB after RAID 5 Out-of-the-box capacity without RAID: 16 TB (4x4 TB) 32 TB Out-of-the-box storage: 24 TB after RAID 5 Out-of-the-box capacity without RAID: 32 TB (4x8 TB)
RAID	Factory RAID level: 5 Supported RAID levels: 0, 1, 5, 6, 10
Switch	16 ports integrated, 305 W total power budget Power over Ethernet (PoE) IEEE 802.3at Class 4
Power	Max 650 W, 305 W PoE dedicated 100–240 V AC, 50–60 Hz
Power consumption	(Excluding power consumption from connected devices) Typical power consumption 8 TB: 31 W 16 TB: 34 W 32 TB: 44 W Maximum power consumption 8 TB: 37 W 16 TB: 41 W 32 TB: 49 W
Connectors	Front side: 1x USB 3.0 Rear side: 16x PoE RJ45 1 Gbps 1x AUX RJ45 2.5 Gbps 1x LAN RJ45 2.5 Gbps 1x LAN SFP 1 Gbps 1x USB 2.0 1x power connector
Video	
Recording	Qualified for recording up to 16 video sources with a total recording rate up to 256 Mbit/s
Video compression	H.264 (MPEG-4 Part 10/AVC), H.265 (MPEG-H Part 2/HEVC) Depending on camera support
Resolution	Supports all camera resolutions
Frame rate	Supports all camera frame rates
Audio	
Audio streaming	One-way audio recording depending on camera support
Audio encoding	AAC Depending on camera support
Network	
Network protocols	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS ^a , HTTP/2, TLS ^b , SFTP, SMTP, mDNS (Bonjour), UPnP ^c , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, NTP, NTS, RTSP, TCP, UDP, IGMPv1/v2/v3, ICMP, DHCPv4/v6, ARP, SSH, LLDP, IEEE 802.1X (EAP-TLS), IEEE 802.1AR
System integration	
Application Programming Interface	Open API for software integration, including VAPIX [®] and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community . One-click cloud connection
Video management systems	Compatible with AXIS Camera Station Edge, AXIS Camera Station Pro, AXIS Camera Station 5, and video management software from Axis' partners available at axis.com/vms .
Event triggers	Hard drive error, hard drive temperature warning, CPU temperature warning, fan error, PoE budget exceeded, RAID warning

Approvals	
Product markings	UL/cUL, BIS, CE, VCCI, NOM, RCM, BSMI
Supply chain	TAA compliant
EMC	EN 55035, EN 55032 Class A, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A) Japan: VCCI Class A USA: FCC Part 15 Subpart B Class A Taiwan: CNS 15936
Safety	CAN/CSA C22.2 No. 62368-1, IEC/EN/UL 62368-1 ed. 3, RCM AS/NZS 62368.1:2018, IS 13252, BSMI-mark, NOM-019
Environment	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP20
Network	NIST SP500-267
Cybersecurity	ETSI EN 303 645, BSI IT Security Label, FIPS 140
Cybersecurity	
Edge security	Software: Signed OS, digest authentication, password protection Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)
Network security	IEEE 802.1X (EAP-TLS) ^c , IEEE 802.1AR, HTTPS/HSTS ^d , TLS v1.2/v1.3 ^e , Network Time Security (NTS), X.509 Certificate PKI
Documentation	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity
General	
Supported devices	Axis devices with firmware 5.50 or later AXIS Companion mini cameras and third-party cameras are not supported
Casing	Steel casing Color: black NCS S 9000-N
Form factor	Rack 1U Compatible with EIA-310 racks
Operating conditions	Temperature: 0 °C to 45 °C (32 °F to 113 °F) Humidity: 10–85% RH (non-condensing)
Storage conditions	Temperature: -20 °C to 65 °C (-4 °F to 149 °F) Humidity: 5–90% RH (non-condensing)
Dimensions	484 x 402 x 44.1 mm (19.1 x 15.8 x 1.7 in) Minimum rail depth ^f : 398 mm (15.7 in) Product installation depth ^g : 377 mm (14.8 in) Rail adjustability range ^h : 376–499 mm (14.8–19.6 in)
Weight	8 TB: 10.24 kg (22.6 lb) 16 TB: 10.08 kg (22.2 lb) 32 TB: 10.68 kg (23.5 lb)
Box content	Recorder, rack rails, front cover, rubber feet, installation guide, power cord, screws
Optional accessories	AXIS TS3901 Rail Extensions For more accessories, go to axis.com/products/axis-s3016
System tools	AXIS Site Designer, AXIS Device Manager, product selector, accessory selector Available at axis.com
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese
Warranty	5-year warranty, see axis.com/warranty

Part numbers Available at axis.com/products/axis-s3016#part-numbers

Sustainability


Substance control PVC free
RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials Renewable carbon-based plastic content: 63% (recycled)
Screened for conflict minerals in accordance with OECD guidelines
To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

- a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- b. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- c. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- d. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- e. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
- f. Measured from the outside-facing surface of the front rack post until the end of the rail.
- g. Measured from the outside-facing surface of the front rack post to the back of the product.
- h. The allowable distance between the outside-facing surface of the front and rear rack posts.

Dimension drawing

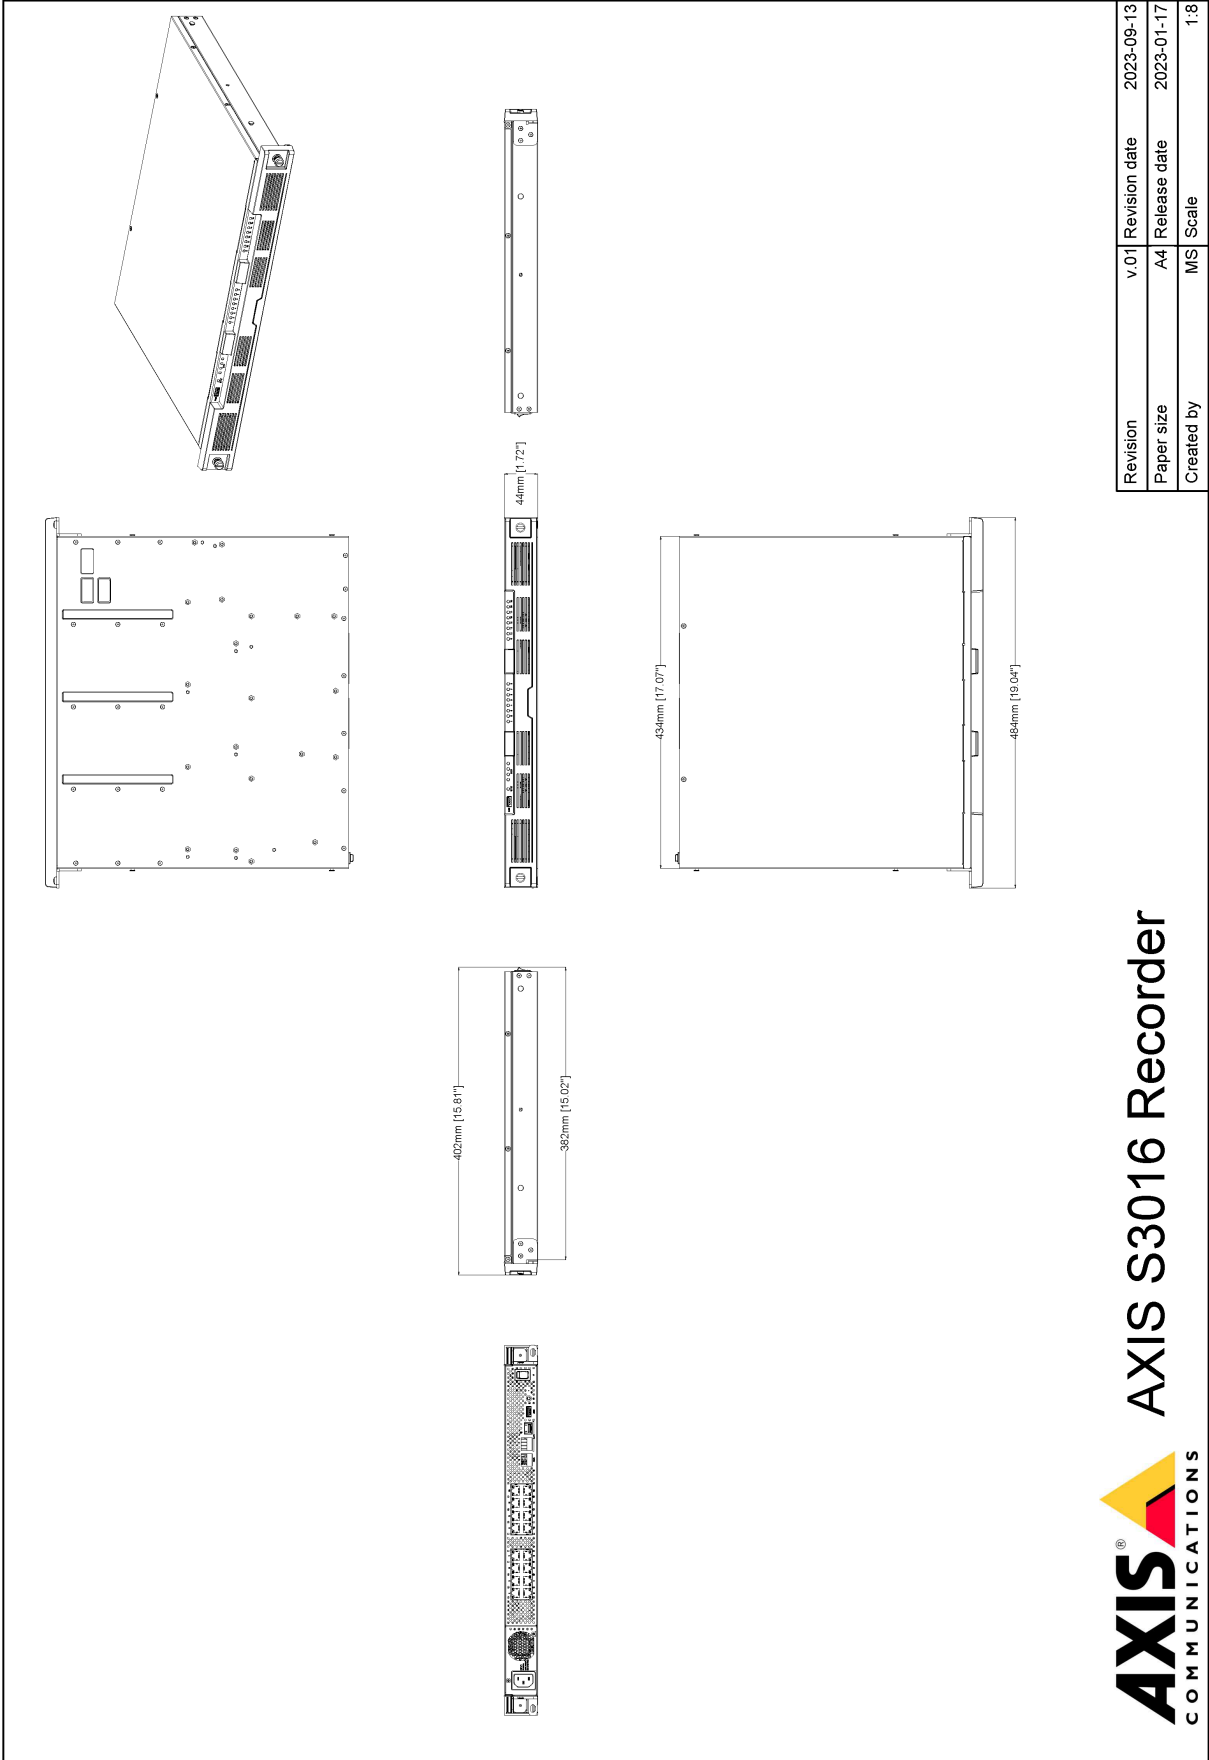


AXIS COMMUNICATIONS
AXIS S3016 Recorder

www.axis.com

Revision	v.01	Revision date	2023-09-13
Paper size	A4	Release date	2023-01-17
Created by	MS	Scale	1:8

© 2023 Axis Communications

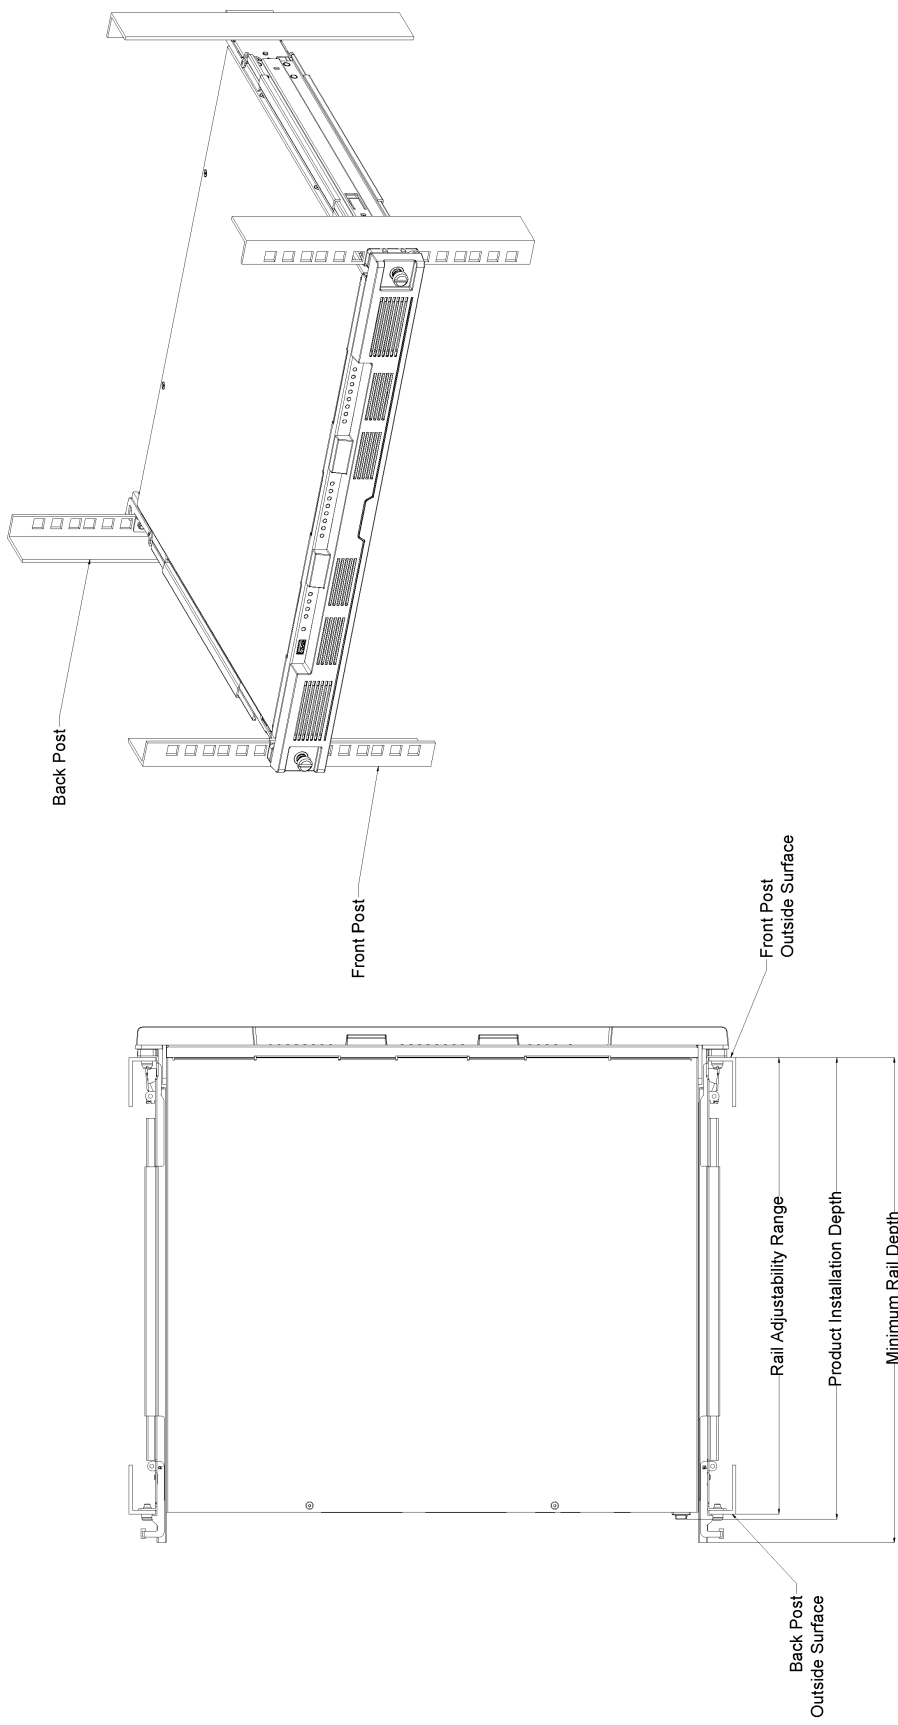

AXIS COMMUNICATIONS **AXIS S3016 Recorder**

Revision	v.01	Revision date	2023-09-13
Paper size	A4	Release date	2023-09-13
Created by	MS	Scale	1:5

© 2023 Axis Communications

www.axis.com

Highlighted capabilities

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protect-

ing cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

For more information, see axis.com/glossary