

HOW TO.

Setup Custom actions in AXIS Camera Station Edge

Use case

In AXIS Camera Station Edge there is support for Custom actions with the purpose to help you engineer solutions.

A custom action is a flexible way to add camera specific features that are not natively available in AXIS Camera Station Edge, i.e., wiper control, LED light control or I/O control. When configured, the Custom action will show up in the AXIS Camera Station Edge client interface, both the mobile app and the Windows application.

The purpose for this document is to describe the required setup steps.

Prerequisites

- Axis camera connected and installed in AXIS Camera Station Edge


General configuration steps

Custom actions are action rules that can be triggered from a virtual input, and they are defined in the Event configuration in the camera.

To enable a Custom action in AXIS Camera Station Edge you will need to use “Virtual input” as a Condition.

To configure, the general configuration steps is as follows:

1. In AXIS Camera Station Edge, go to Configuration, Cameras tab, right click on the camera you will use, and select Advanced settings.

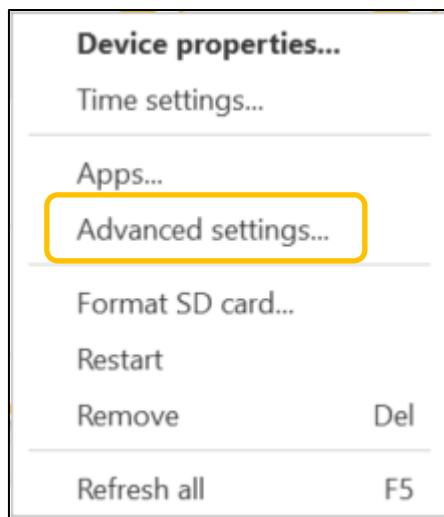


Note. When you enter Advanced settings the first time, an ACAP (WebRTC) will be installed on the camera enabling remote communication.


2. After entering the camera, navigate to System -> Events
3. Choose the tab Rules and click the + to Add a rule
4. Name the rule, select Condition to Virtual input (Virtual input is active) and choose a port.
5. Set the required Action.

Note. There are 2 options for the Action, they can be either a direct trigger with the option to specify a duration or active until you toggle the state. The latter is called “while the rule is active”.

6. Save the Action rule.
7. Close the camera settings page, go back to Configuration -> Cameras in AXIS Camera Station Edge and refresh the connection (right click -> Refresh all)
8. Go to Live view in AXIS Camera Station Edge and select the view of the camera configured in the steps above. Right click and this menu appears in AXIS Camera Station Edge Windows application:

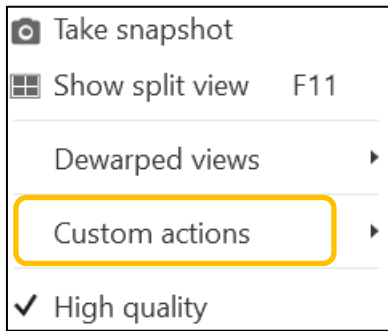

In the mobile app, select the camera and click on the symbol in the bottom bar:

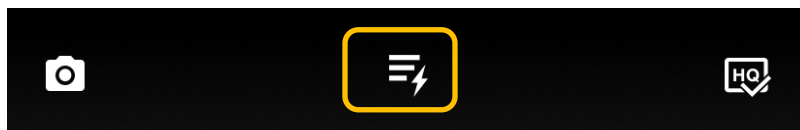

Custom actions - example

In this example it shows the configuration to make the status LED of a camera flash.

Action rule configuration in the camera

A screenshot of an action rule configuration form. At the top, there is a checked checkbox labeled 'Use this rule'. Below this, the 'Name' field contains 'Flash LED'. The 'Wait between actions (hh:mm:ss)' field contains '00:00:00'. Under the 'Condition' section, there is an unchecked checkbox 'Use this condition as a trigger', a dropdown menu showing 'Virtual input is active', and another unchecked checkbox 'Invert this condition'. The 'Port' field is a dropdown menu showing '6'. At the bottom right, there are 'Cancel' and 'Save' buttons.

The option “while the rule is active” means that the action can be turned on and off.

Action rule configuration in the camera to trigger ON/OFF


Action

Flash status LED while the rule is active


Color

Green


Custom actions ON & OFF in the mobile app

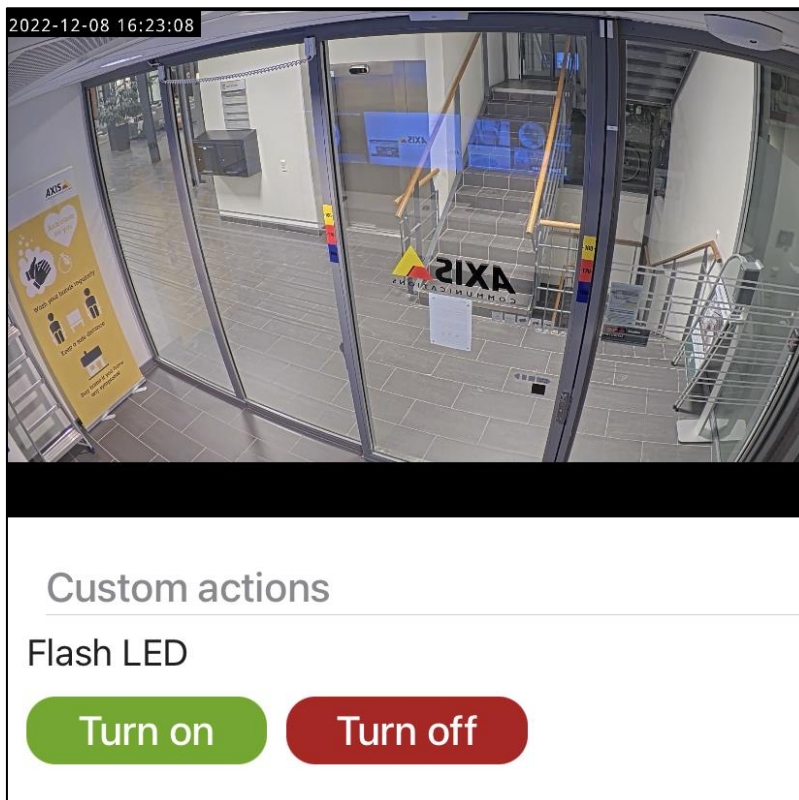

Custom action Flash LED OFF in AXIS Camera Station Edge Windows

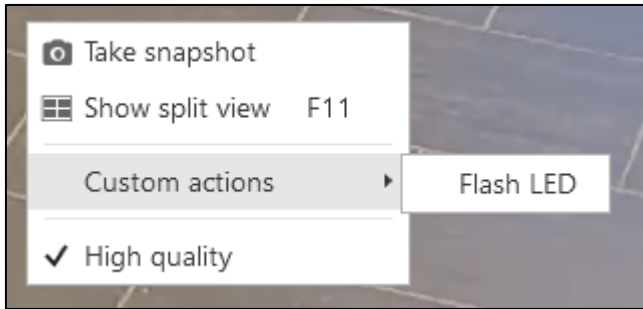

Custom action Flash LED ON in AXIS Camera Station Edge Windows

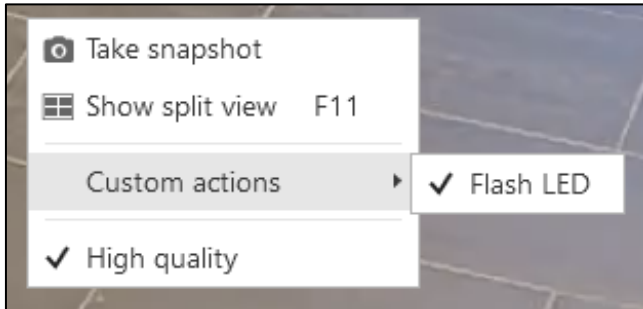


You can also set the option to flash the LED with a duration

Action rule configuration in the camera with an action to flash LED for 5 sec

Action
Flash status LED
Color
Green
Duration (hh:mm:ss)
00:00:05

Custom actions trigger with a set duration

2022-12-08 16:27:47



Custom actions

Flash LED

Trigger

Tip! If you use more than one Custom action, they will be shown in alphabetical order, but you can also name the action rules to start with a numerical value. This is especially useful if you want to have a particular Custom action on top of the list.

Custom actions

1_Flash LED

Turn on Turn off

2_Flash LED

Trigger