

AXIS Q1800-LE-3 License Plate Verifier Kit

Robust, cost-effective kit for high speeds

With AXIS License Plate Verifier preinstalled, this purpose-tuned camera kit is preconfigured for accurate license plate reading 24/7 at speeds up to 200 km/h (124 mph) and distances up to 100 m (328 ft). It facilitates fast and efficient search in the VMS, so you can quickly find specific plates in video footage. Easy to set up and install, its robust design ensures reliable performance in extreme weather. With a built-in weathershield, it withstands wind forces up to 60 m/s (134 mph), ensuring durability in the toughest conditions.

- > [AXIS License Plate Verifier preinstalled](#)
- > [Purpose-tuned for license plate recognition](#)
- > [Read license plates up to 200 km/h \(124 mph\)](#)
- > [Reading range of up to 100 m \(328 ft\)](#)
- > [Robust design withstands tough weather](#)



AXIS License Plate Verifier

Application

Compute platform	Edge
Licenses	AXIS License Plate Verifier license included.
Configuration	Web configuration included
Settings	Define area of interest in scene. Allow- and blocklist logic. Barrier mode: Open to all, open to allowlisted, open to all but blocklisted. Minimum width: 130 pixels for one-row license plates; 70 pixels for two-row license plates. FIFO event log entries including thumbnail image of license plate. Up to 1000 entries on camera storage. Up to 100 000 entries on AXIS Surveillance Cards. Configurable retention time of stored events
Detection time	Less than 1 second.

System integration

Application Programming Interface	Open API for software integration.
Event streaming	Integrates with camera event management system to enable event streaming to management software and camera actions such as I/O control, notification, and edge storage.
Supported devices	Direct integration with Axis network door controllers and Axis A91 Network I/O Relay Modules.

General

Supported countries	For a complete list of supported countries, go to the product page at axis.com
Languages	English

AXIS Q1800-LE-3 License Plate Verifier Kit

Camera

Image sensor	1/2.8" progressive scan RGB CMOS Pixel size 2.9 µm
Lens	Vari-focal, 7–137 mm, F1.5–4.0 Horizontal field of view: 38°–2.3° Vertical field of view: 22°–1.3° Minimum focus distance: 1.2 m (3.9 ft) Remote zoom and focus, P-Iris control Thread for 62 mm filters, max filter thickness: 5 mm
Day and night	Automatic IR-cut filter in day mode IR-pass filter 720 nm in night mode
Minimum illumination	Color: 0.06 lux at 50 IRE, F1.5 B/W: 0.01 lux at 50 IRE, F1.5 0 lux with IR illumination on
Shutter speed	1080p @ 25/30 fps (WDR): 1/37000 s to 2 s 1080p @ 50/60 fps: 1/71500 s to 2 s 1080p @ 90 fps: 1/111000 s to 2 s
Camera angle adjustment	Pan ±180°, tilt 0 to -90°, roll -90 to 270°

License Plate Capture

Detection range	Day: 20–100 m (66–328 ft) Night: 20–50 m (66–164 ft) Night detection range up to 100 m (328 ft) with optional accessory AXIS T90D20 IR-LED Illuminator
IR illumination	OptimizedIR with power-efficient, long-life 850 nm IR LED's with adjustable angle of illumination and intensity. Range of reach 40 m (131 ft) in wide field of view and 50 m (164 ft) in full tele view, or more depending on the scene
Vehicle speed	Up to 200 km/h (124 mph) with built-in edge analytics
Coverage	Single lane with optional edge analytics
Installation	Mounting height: Up to 10 m (33 ft) Distance from road: Up to 10 m (33 ft) Camera detects tilt and roll angle automatically Built-in licence plate capture assistant optimizes video settings based on mounting height, distance to vehicle, and expected vehicle speed

System on chip (SoC)

Model	ARTPEC-8
Memory	2048 MB RAM, 8192 MB Flash
Compute capabilities	Deep learning processing unit (DLPU)

Video

Video compression	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
Resolution	4:3: 1400x1050 to 160x120 16:9: 1920x1080 to 320x180
Frame rate	With WDR: Up to 25/30 fps (50/60 Hz) in all resolutions No WDR: Up to 90 fps (50/60 Hz) in all resolutions
Video streaming	Up to 20 unique and configurable video streams ^a Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator
Signal-to-noise ratio	>55 dB
WDR	Forensic WDR: Up to 120 dB depending on scene
Noise reduction	Spatial filter (2D noise reduction) Temporal filter (3D noise reduction)
Image settings	Saturation, contrast, brightness, sharpness, white balance, day/night threshold, local contrast, tone mapping, exposure mode, exposure zones, defog, barrel distortion correction, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, dynamic text and image overlay, polygon privacy mask, target aperture Scene profiles: license plate

Image processing Axis Zipstream, Forensic WDR, Lightfinder 2.0, OptimizedIR

Audio

Audio features	Automatic gain control 10-band graphic equalizer for audio input Speaker pairing Spectrum visualizer ^b
Audio streaming	Two-way (half duplex)
Audio input	Input through microphone pairing Input for external unbalanced microphone, optional 5 V microphone power Digital input, optional 12 V ring power Unbalanced line input
Audio output	Output through speaker pairing
Audio encoding	24bit LPCM, AAC-LC 8/16/32/44.1/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz Configurable bit rate

Network

Network protocols	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS ^c , HTTP/2, TLS ^c , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP [®] , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, DHCPv4/v6, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)
--------------------------	--

System integration

Application Programming Interface	Open API for software integration, including VAPIX [®] , metadata and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community . ACAP includes Native SDK and Computer Vision SDK. One-click cloud connection ONVIF [®] Profile G, ONVIF [®] Profile M, ONVIF [®] Profile S, and ONVIF [®] Profile T, specifications at onvif.org
Video management systems	Compatible with AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms
Onscreen controls	Video streaming indicator Day/night shift Image stabilization Defog Autofocus Privacy masks Wide dynamic range IR illumination Media clip License plate overlay
Edge-to-edge	Microphone pairing Radar pairing Speaker pairing
Event conditions	Device status: above/below/within operating temperature, IP address blocked, IP address removed, live stream active, network lost, new IP address, ring power overcurrent protection, system ready, within operating temperature Digital audio: digital signal contains Axis metadata, digital signal has invalid sample rate, digital signal missing, digital signal okay Edge storage: recording ongoing, storage disruption, storage health issues detected I/O: digital input is active, manual trigger, virtual input MQTT: stateless Scheduled and recurring: schedule Video: average bitrate degradation, day-night mode, tampering
Event actions	Day-night mode Defog I/O: toggle I/O once, toggle I/O while the rule is active Illumination: use lights, use lights while the rule is active Images: send images through FTP, HTTP, SFTP MQTT: publish Notification: HTTP, HTTPS, TCP and email Overlay text Recordings: SD card and network share SNMP traps: send, send while the rule is active Video clips: send video clips through FTP, HTTP, SFTP WDR mode


Built-in installation aids	Pixel counter, remote zoom and focus, level grid, leveling assistant, traffic camera installation assistance	Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4, typical 12.6 W, max 25.5 W Power over Ethernet (PoE) IEEE 802.3bt Type 3 Class 6, typical 12.6 W, max 51 W Midspan 60 W, IEEE 802.3bt Type 3 Class 6 required for PoE under IEEE 802.3at Type 2 Class 4 (30 W) to a second device 10–28 V DC, typical 11 W, max 29 W 20–24 V AC, typical 11 VA, max 28 VA Features: power profiles, power meter
Analytics		
Applications	Included AXIS License Plate Verifier, AXIS Scene Metadata, AXIS Video Motion Detection, active tampering alarm, audio detection Supported AXIS Speed Monitor Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap	
Approvals		
Product markings	UL/cUL, BIS, UKCA, CE, KC, VCCI, RCM	
Supply chain	TAA compliant	
EMC	CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES(A)/NMB(A) Japan: VCCI Class A Korea: KS C 9835, KS C 9832 Class A USA: FCC Part 15 Subpart B Class A Railway: IEC 62236-4	
Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, IEC/EN 62471 risk group exempt, IS 13252	
Environment	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66, IEC/EN 62262 IK10 body, IK08 glass, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9)	
Network	NIST SP500-267	
Cybersecurity	ETSI EN 303 645, FIPS 140	
Cybersecurity		
Edge security	Software: Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 OpenID Authorization Code Flow for centralized ADFS account management, password protection Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)	
Network security	IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2) ^c , IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR, HTTPS/HSTS ^c , TLS v1.2/v1.3 ^c , Network Time Security (NTS), X.509 Certificate PKI, host-based firewall	
Documentation	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity	
General		
Casing	IP66 and NEMA 4X-rated IK10 impact-resistant aluminum enclosure with integrated dehumidifying membrane, IK08 impact-resistant glass front window Color: grey NCS S 5502-B, black NCS S 9000-N For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting .	
Mounting	Mounting bracket with junction box holes (double-gang, single-gang, 4" square, and 4" octagon) ¾" (M25) conduit side entries	
Power	Power over Ethernet (PoE) IEEE 802.3af/802.3at Type 1 Class 3, typical 12.6 W, max 12.95 W (no IR, no heaters)	
Connectors	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE, RJ45 1000BASE-T PoE output to power an external PoE device I/O: 4-pin 2.5 mm terminal block for two configurable supervised inputs / digital outputs (12 V DC output, max. load 50 mA) Audio: 3.5 mm mic/line in Power: DC input	
Storage	Support for microSD/microSDHC/microSDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see axis.com	
Operating conditions	Temperature: -40 °C to 60 °C (-40 °F to 140 °F) Maximum temperature according to NEMA TS 2 (2.2.7): 74 °C (165 °F) Humidity: 10–85% RH (condensing)	
Storage conditions	Temperature: -40 °C to 65 °C (-40 °F to 149 °F) Humidity: 5–95% RH (non-condensing)	
Dimensions	For the overall product dimensions, see the dimension drawing in this datasheet. Effective Projected Area (EPA): 0.054 m ² (0.58 ft ²)	
Weight	3200 g (7.05 lb)	
Box content	Camera, installation guide, terminal block connector, RJ45 cable, connector guard, cable gaskets, owner authentication key	
Optional accessories	AXIS T8415 Wireless Installation Tool AXIS Surveillance Cards For more accessories, go to axis.com/products/axis-q1800-le#accessories	
System tools	AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator Available at axis.com	
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese	
Warranty	5-year warranty, see axis.com/warranty	
Part numbers	Available at axis.com/products/axis-q1800-le#part-numbers	
Sustainability		
Substance control	PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709 RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu	
Materials	Renewable carbon-based plastic content: 60% (recycled: 1%, bio-based: 59%) Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability	
Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org	
	<p>a. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.</p> <p>b. Feature available with ACAP</p> <p>c. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).</p>	

Detect, Observe, Recognize, Identify (DORI)

	DORI definition	Distance (wide)	Distance (tele)
Detect	25 px/m (8 px/ft)	96.7 m (317.18 ft)	1884.2 m (6180.18 ft)
Observe	63 px/m (19 px/ft)	38.4 m (125.95 ft)	747.7 m (2452.46 ft)
Recognize	125 px/m (38 px/ft)	19.3 m (63.30 ft)	376.8 m (1235.90 ft)
Identify	250 px/m (76 px/ft)	9.7 m (31.82 ft)	188.4 m (617.95 ft)

The DORI values are calculated using pixel densities for different use cases as recommended by the EN-62676-4 standard. The calculations use the center of the image as the reference point and consider lens distortion. The possibility to recognize or identify a person or object depends on factors such as object motion, video compression, lighting conditions, and camera focus. Use margins when planning. The pixel density varies across the image, and the calculated values can differ from the distances in the real world.

Dimension drawing

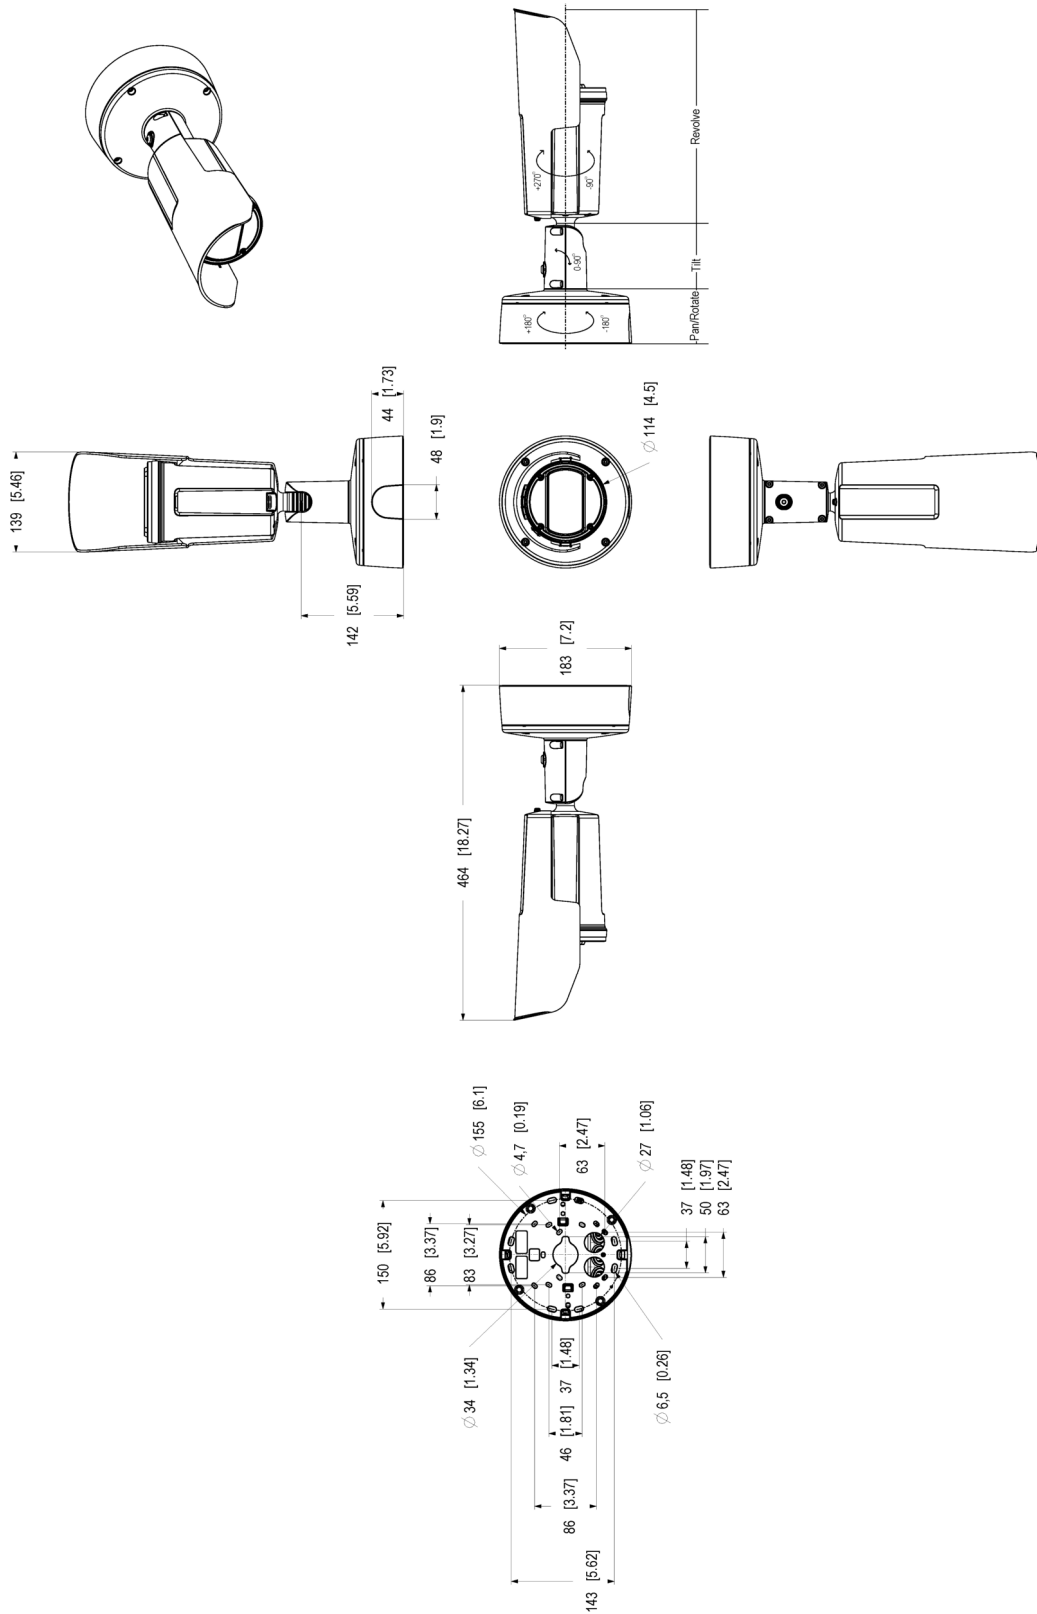

Dimensions in mm (in)		
2024.03.18	M1.1	1.3
3177020	A1	1.0

AXIS Q1800-LE-3 License Plate Verifier Kit

Highlighted capabilities

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a security breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

AXIS License Plate Verifier

AXIS License Plate Verifier offers real-time, AI-powered license plate recognition for a wide range of traffic applications, including vehicle access, vehicle search, and parking solutions. With an intuitive user interface, it supports event log entries with license plate thumbnail images, simplifying administration and follow-up. Moreover, our edge-based license plate recognition approach means the camera manages the processing and storage, eliminating the need for expensive servers and reducing bandwidth requirements. Finally, it's easy to set up, especially when investing in our ready-to-use, purpose-tuned kits.

Electronic image stabilization

Electronic image stabilization (EIS) provides smooth video in situations where a camera is subject to vibrations. Built-in gyroscopic sensors continuously detect the camera's movements and vibrations, and they automatically adjust the frame to ensure you always capture the details you need. Electronic image stabilization relies on different algorithms for modeling camera motion, which are used to correct the images.

Forensic WDR

Axis cameras with wide dynamic range (WDR) technology make the difference between seeing important forensic details clearly and seeing nothing but a blur in challenging light conditions. The difference between the darkest and the brightest spots can spell trouble for image usability and clarity. Forensic WDR effectively reduces visible noise and artifacts to deliver video tuned for maximal forensic usability.

Lightfinder

The Axis Lightfinder technology delivers high-resolution, full-color video with a minimum of motion blur even in near darkness. Because it strips away noise, Lightfinder makes dark areas in a scene visible and captures details in very low light. Cameras with Lightfinder discern color in low light better than the human eye. In surveillance, color may be the critical factor to identify a person, an object, or a vehicle.

OptimizedIR

Axis OptimizedIR provides a unique and powerful combination of camera intelligence and sophisticated LED technology, resulting in our most advanced camera-integrated IR solutions for complete darkness. In our pan-tilt-zoom (PTZ) cameras with OptimizedIR, the IR beam automatically adapts and becomes wider or narrower as the camera zooms in and out to make sure that the entire field of view is always evenly illuminated.

For more information, see axis.com/glossary