

AXIS P3737-PLE Panoramic Camera

4x 5 MP multidirectional with deep learning

This multidirectional camera offers four channels with 5 MP per channel to deliver excellent overviews and detailed coverage. It includes 360° IR illumination for clear, reflection-free footage and excellent image quality even in low light or complete darkness. This flexible camera offers various mounting options. For instance, it can be recessed mounted for discreet surveillance or mounted in ceilings for complete 360° coverage. With highly efficient power consumption, it ensures lower operating costs. It also supports powerful analytics based on deep learning. Furthermore, Axis Edge Vault, a hardware-based cybersecurity platform, guarantees the device's integrity and protects it from unauthorized access.

- > [4x 5 MP at 20 fps per channel](#)
- > [360° IR illumination with individually controlled LEDs](#)
- > [Flexible mounting options](#)
- > [Support for advanced analytics](#)
- > [Axis Edge Vault safeguards the device](#)



AXIS P3737-PLE Panoramic Camera


Camera		System integration	
Image sensor	4x 1/2.7" progressive scan RGB CMOS Pixel size 2.0 µm	Application Programming Interface	Open API for software integration, including VAPIX®, metadata and AXIS Camera Application Platform (ACAP); specifications at axis.com/developer-community . ACAP includes Native SDK and Computer Vision SDK. One-click cloud connection ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at onvif.org
Lens	Varifocal, 3.2–8.1 mm, F1.9-3.2 Horizontal field of view: 99°–37° Vertical field of view: 70°–28° Diagonal field of view: 134°–47° Minimum focus distance: 0.5 m (1.6 ft) Fixed iris, IR corrected, remote zoom and focus	Video management systems	Compatible with AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms
Day and night	Automatic IR-cut filter	Onscreen controls	Autofocus Video streaming indicator IR illumination Privacy masks Media clip
Minimum illumination	Color: 0.19 lux at 50 IRE, F1.9 B/W: 0 lux at 50 IRE, F1.9 0 lux with IR illumination on	Edge-to-edge	Speaker pairing
Shutter speed	5 MP and WDR on: 1/28000 s to 1/5 s Quad HD and WDR on: 1/33500 s to 1/5 s WDR off: 1/50000 s to 1/5 s	Event conditions	Device status: above operating temperature, above or below operating temperature, below operating temperature, within operating temperature, IP address removed, new IP address, network lost, system ready, live stream active, casing open Edge storage: recording ongoing, storage disruption, storage health issues detected I/O: manual trigger, virtual input MQTT: stateless Scheduled and recurring: schedule Video: average bitrate degradation, day-night mode, tampering
Camera angle adjustment	Pan ±90°, tilt +25 to +95°, rotation -5° to +95°, twist ±20°	Event actions	Day-night mode Illumination: use lights, use lights while the rule is active MQTT: publish Notification: HTTP, HTTPS, TCP, and email Overlay text Recordings: record, record while the rule is active SNMP traps: send, send while the rule is active Status LED: flash, flash while the rule is active Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share, and email
System on chip (SoC)		Built-in installation aids	Remote zoom and focus, pixel counter, barrel distortion correction
Model	ARTPEC-8	Analytics	
Memory	4096 MB RAM, 8192 MB Flash	Applications	Included AXIS Object Analytics, AXIS Scene Metadata, AXIS Video Motion Detection, active tampering alarm Supported Support for AXIS Camera Application Platform enabling installation of third-party applications, see axis.com/acap
Compute capabilities	Deep learning processing unit (DLPU)	Multisensor analytics	4 channels analytics support ^b
Video		AXIS Object Analytics	Object classes: humans, vehicles (types: cars, buses, trucks, bikes, other) Scenarios: line crossing, object in area, time in area, crossline counting, occupancy in area Up to 8 scenarios Other features: triggered objects visualized with trajectories, and color-coded bounding boxes and tables Polygon include/exclude areas Perspective configuration ONVIF Motion Alarm event
Video compression	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG	AXIS Scene Metadata	Object classes: humans, faces, vehicles (types: cars, buses, trucks, bikes), license plates Confidence, position Object attributes: vehicle color, upper/lower clothing color, confidence, position
Resolution	4:3 4x 2592x1944 (4x 5 MP) to 4x 320x240 16:9 4x2560x1440 (4x Quad HD) to 4x 320x180	Approvals	
Frame rate	5 MP: Up to 20/20 fps (50/60 Hz) in all resolutions Quad HD: Up to 25/30 fps (50/60 Hz) in all resolutions	Product markings	CSA, UL/cUL, UKCA, CE, KC, EAC, VCCI, RCM
Video streaming	Multiple, individually configurable streams in H.264, H.265 and Motion JPG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator	Supply chain	TAA compliant
Signal-to-noise ratio	>55 dB	EMC	CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A)
WDR	Forensic WDR: Up to 120 dB depending on scene		
Noise reduction	Spatial filter (2D noise reduction) Temporal filter (3D noise reduction)		
Image settings	Saturation, contrast, brightness, sharpness, white balance, day/night threshold, local contrast, tone mapping, exposure mode, exposure zones, barrel distortion correction, compression, rotation: 0°, 90°, 180°, 270° including corridor format, mirroring, text and image overlay, dynamic text and image overlay, privacy masks, polygon privacy mask		
Image processing	Forensic WDR, Lightfinder, OptimizedIR		
Audio			
Audio input/output	Audio features through portcast technology: two-way audio connectivity with AXIS T61 Mk II		
Audio streaming	Two-way (half duplex, full duplex) via network speaker pairing technology		
Network			
Network protocols	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS ^a , HTTP/2, TLS ^a , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP [®] , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf), IEEE 802.1X (EAP-TLS), IEEE 802.1AR		

Support for SD card encryption (AES-XTS-Plain64 256bit)
Recording to network-attached storage (NAS)
For SD card and NAS recommendations see axis.com

	<p>Japan: VCCI Class A Korea: KS C 9835, KS C 9832 Class A USA: FCC Part 15 Subpart B Class A Railway: IEC 62236-4</p>	
Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, IEC/EN 62471 risk group exempt, IS 13252, RCM AS/NZS 62368.1:2022,	Operating conditions
Environment	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK09, ISO 21207 (Method B), MIL-STD-810H (Method 501.7, 502.7, 505.7 506.6, 507.6 509.7, 512.6), NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9), VDMA 24364	Storage conditions
Network	NIST SP500-267, IPv6 USGv6	Dimensions
Cybersecurity	ETSI EN 303 645, FIPS 140	Weight
Cybersecurity		Box content
Edge security	<p>Software: Signed OS, brute force delay protection, digest authentication, password protection Hardware: Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)</p>	Optional accessories
Network security	IEEE 802.1X (EAP-TLS) ^a , IEEE 802.1AR, HTTPS/HSTS ^a , TLS v1.2/v1.3 ^a , Network Time Security (NTS), X.509 Certificate PKI, IP address filtering	System tools
Documentation	<p><i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity</p>	Languages
General		Warranty
Casing	IP66-, IP67-, NEMA 4X- and IK09-rated Polycarbonate hard-coated dome Aluminum and plastic casing, polycarbonate (PC) dome Color: white NCS S 1002-B For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting .	Part numbers
Mounting	Mounting bracket with junction box holes (double-gang, single-gang, 4" square, and 4" octagon) 1/2" (M20) conduit side entry	Sustainability
Power	Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 IR illumination on: class 4, typical 13.25 W, max 23.30 W IR illumination off: class 3, typical 6.80 W, max 12.32 W	Substance control
Connectors	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE	Materials
IR illumination	Optimized IR with power-efficient, long-life 850 nm IR LEDs Range of reach 15m (49.2 ft) or more depending on the scene	Environmental responsibility
Storage	Support for microSD/microSDHC/microSDXC card	

- a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
b. For more information, go to the User manual on axis.com.

Dimension drawing

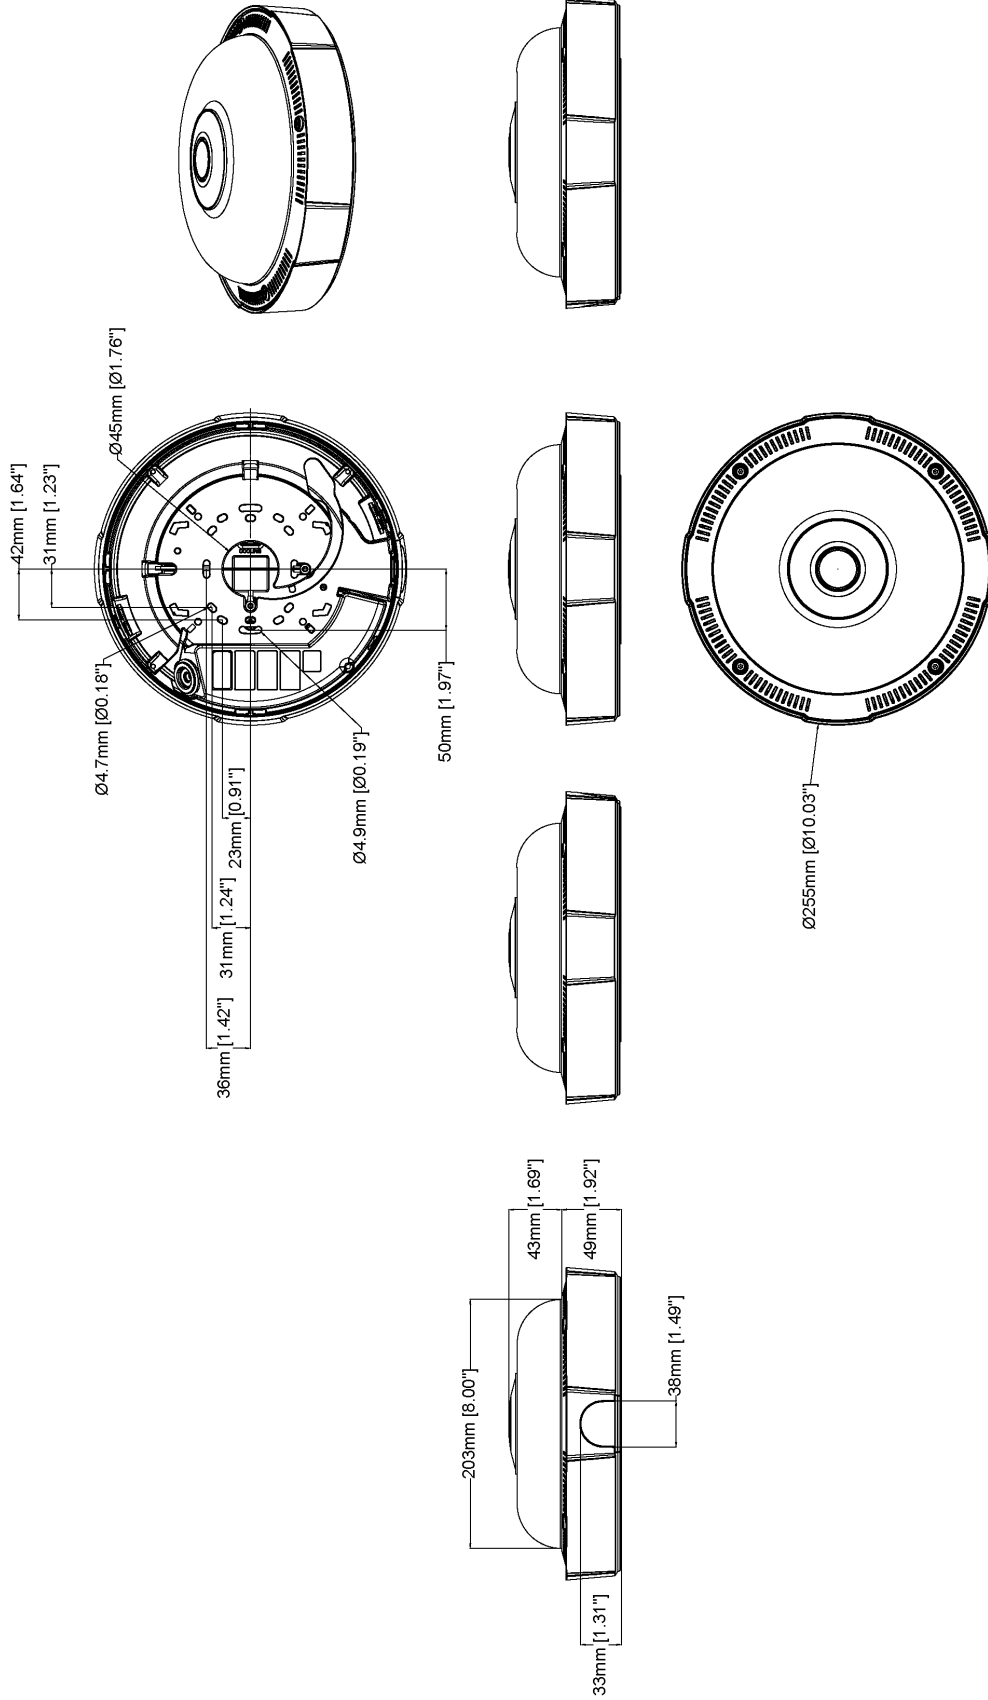

AXIS P3737-PLE Panoramic Camera

www.axis.com

Revision	v.01	Revision date	2023-05-15
Paper size	A4	Release date	2023-05-15
Created by	MF	Scale	1:5

© 2023 Axis Communications

Highlighted capabilities

AXIS Object Analytics

AXIS Object Analytics is a preinstalled, multifeatured video analytics that detects and classifies humans, vehicles, and types of vehicles. Thanks to AI-based algorithms and behavioral conditions, it analyzes the scene and their spatial behavior within – all tailored to your specific needs. Scalable and edge-based, it requires minimum effort to set up and supports various scenarios running simultaneously.

Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a secu-

rity breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to axis.com/solutions/edge-vault.

Zipstream

The Axis Zipstream technology preserves all the important forensic in the video stream while lowering bandwidth and storage requirements by an average of 50%. Zipstream also includes three intelligent algorithms, which ensure that relevant forensic information is identified, recorded, and sent in full resolution and frame rate.

For more information, see axis.com/glossary