

AXIS TA1201 Wall Mount Enclosure

Enclosure for AXIS TA1101-B Wiegand to OSDP converter

AXIS TA1201 Wall Mount Enclosure is designed to house up to four AXIS TA1101-B Wiegand to OSDP converters, offering a secure and flexible installation solution. It supports both wall and DIN rail mounting, providing versatile options for various setups. The enclosure is plenum-rated, making it suitable for use in air-handling spaces, and it supports conduit installation, offering extra protection for wiring. With its easy-to-install design and robust construction, AXIS TA1201 ensures a durable and hassle-free installation.

- > [Supports up to 4 AXIS TA1101-B converters](#)
- > [Supports wall mount and DIN rail mounting](#)
- > [Conduit installation for additional cable protection](#)
- > [Plenum-rated for use in air-handling space](#)



AXIS TA1201 Wall Mount Enclosure

Approvals

Safety

CAN/CSA C22.2 No. 62368-1 ed. 3,
IEC/EN/UL 62368-1 ed. 3

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78

General

Supported products

AXIS TA1101-B Wiegand to OSDP Converter
Up to 4 converters per enclosure

Casing

Aluminum and steel
Color: white NCS S 1002-B

Mounting

Wall mount, DIN rail mount
2x 3/4" (M25) conduit top entries
To install in plenum spaces, remove the two preinstalled
cable gaskets

Maximum load

2 kg (4.4 lb)

Operating conditions

-40 °C to 70 °C (-40 °F to 158 °F)
Humidity 10–85% RH (non-condensing)

Storage conditions

-40 °C to 70 °C (-40 °F to 158 °F)
Humidity 5–95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension
drawing in this datasheet.

Weight

785 g (1.7 lb)

Box content

Wall mount enclosure, installation guide, two spare
cable gaskets

Optional accessories

AXIS TA1901 DIN Rail Clip
For more accessories, go to axis.com/products/axis-ta1201-wall-mount-enclosure#compatible-products

Warranty

3-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-ta1201-wall-mount-enclosure#part-numbers


Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA
Standard JS709
RoHS in accordance with EU RoHS Directive 2011/65/
EU and 2015/863, and standard EN IEC 63000:2018
REACH in accordance with (EC) No 1907/2006. For SCIP
UUID, see echa.europa.eu

Environmental responsibility

axis.com/environmental-responsibility
Axis Communications is a signatory of the UN Global
Compact, read more at unglobalcompact.org

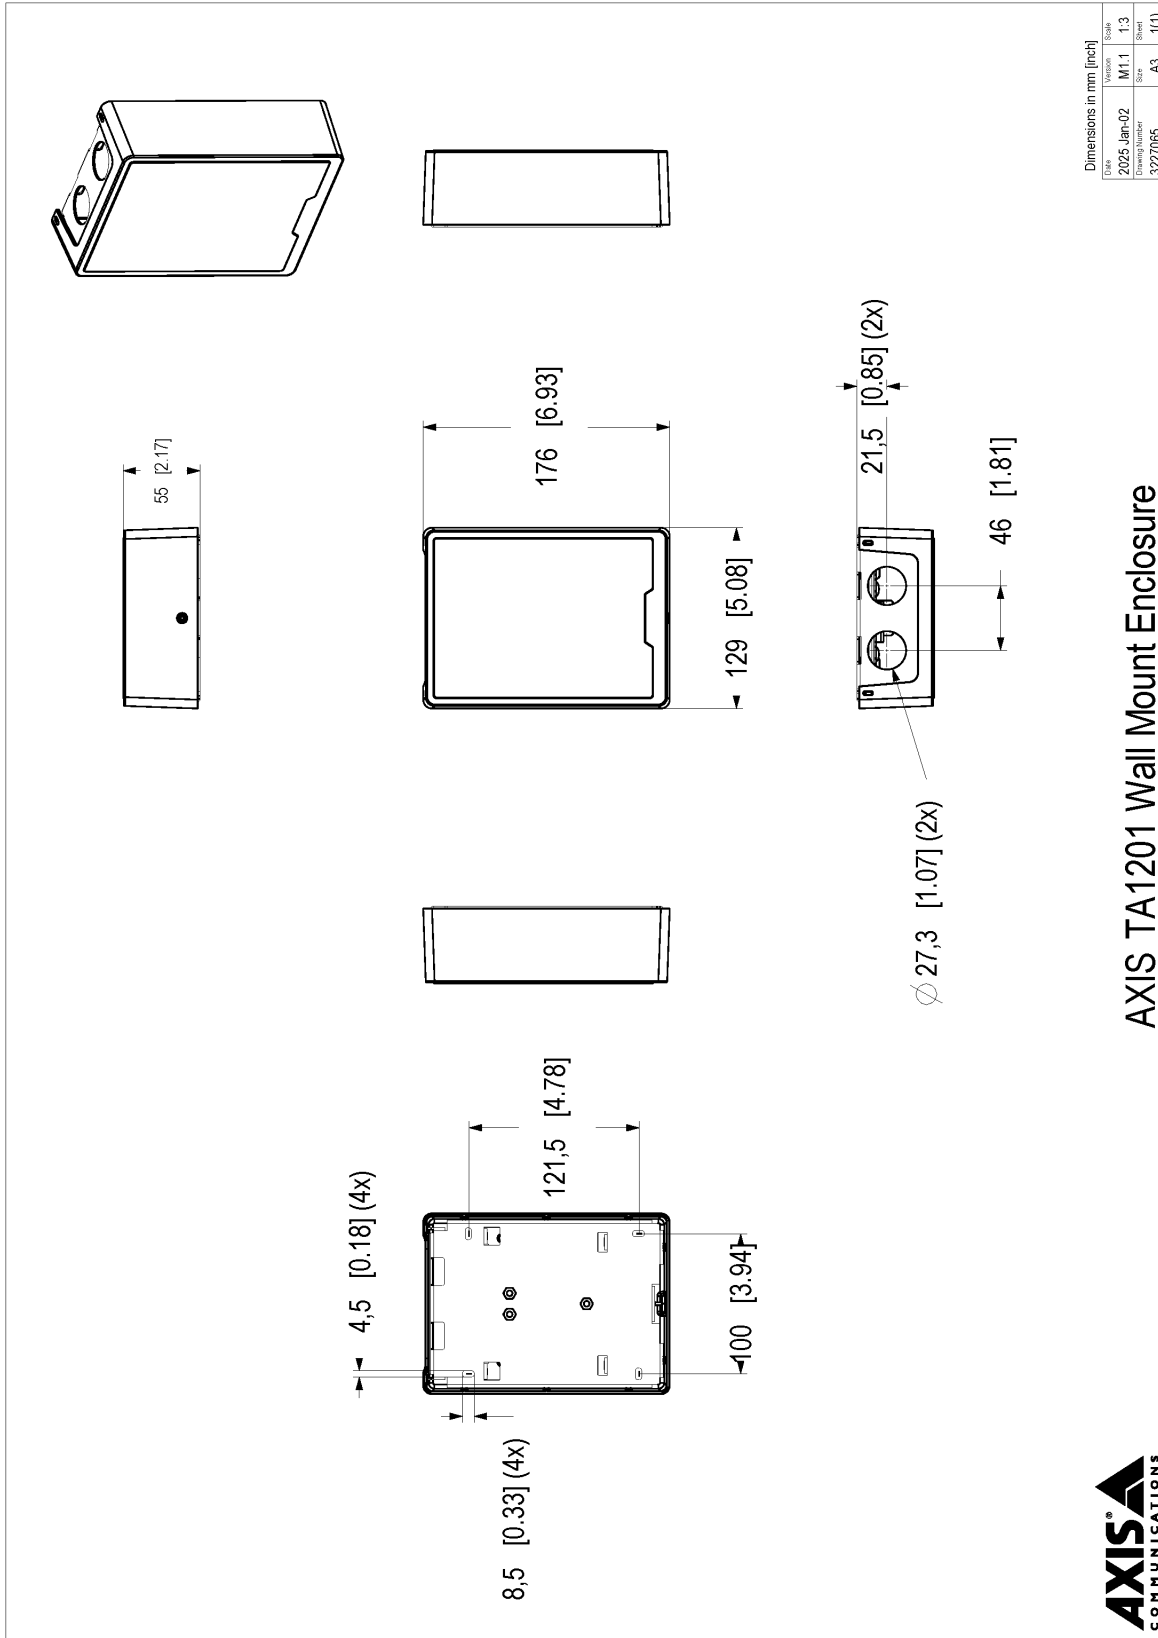

AXIS TA1201 Wall Mount Enclosure



© 2025 Axis Communications AB. All rights reserved.